



ASSEMBLING THE SPARLATOR® WATER SAVING SHOWERS AND HOSES

There are no tools needed to assemble the Sparlator® Water Saving Hose. It's easy to make it fit tight only by using your hands. Use a damp towel for a tighter grip.

The Sparlator® Water Saving Hose requires no gasket between hose and hand shower, unlike other hoses. Enclosed gaskets are mainly meant for assemblage in the connection between hose and mixer tap.

The Sparlator® Water Saving Hose saves between 1 and 2 litres/minute extra combined with our Water Saving Showers. The Water Saving Hose is not suitable in low pressure systems (below 3 bars).

The Sparlator® Water Saving Hose has a conical nut in one end and a cylindrical one in the other end, but the threads are the same in both ends. Choose the model that fits best considering the suspension device for the shower handle and the design of the mixer tap.

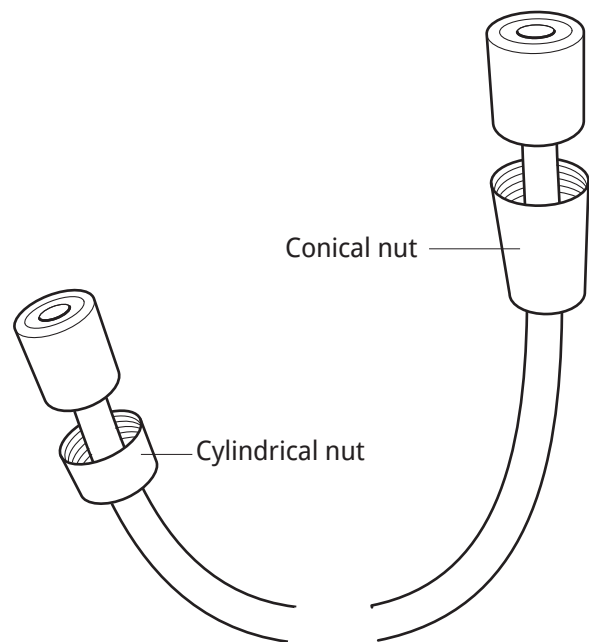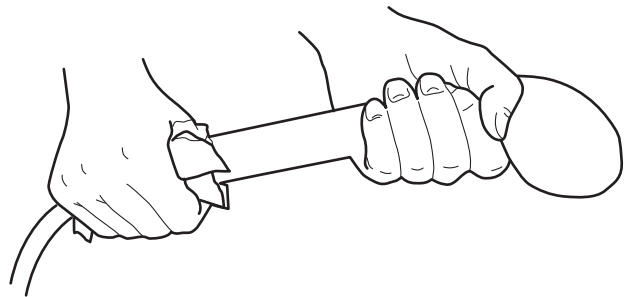

ELLESS 

WATER SAVING SYSTEM

ELLESS Water Saving System AB
Phone: +46 (0) 8 - 600 50 02

Patrick Lundberg
patrick@ewss.se

Stefan Rosén
stefan@ewss.se